


Co-hosting / Co-location Cabinets



Features

- Each compartment has separate secure power and cable pathways, allow for common and unique DC power distribution to each bay.
- AC power distributed from a DC exchange
- Accessible through back and front doors
- Physical security with individual key compartments
- Mesh or perforated door options
- Seismic compliant option

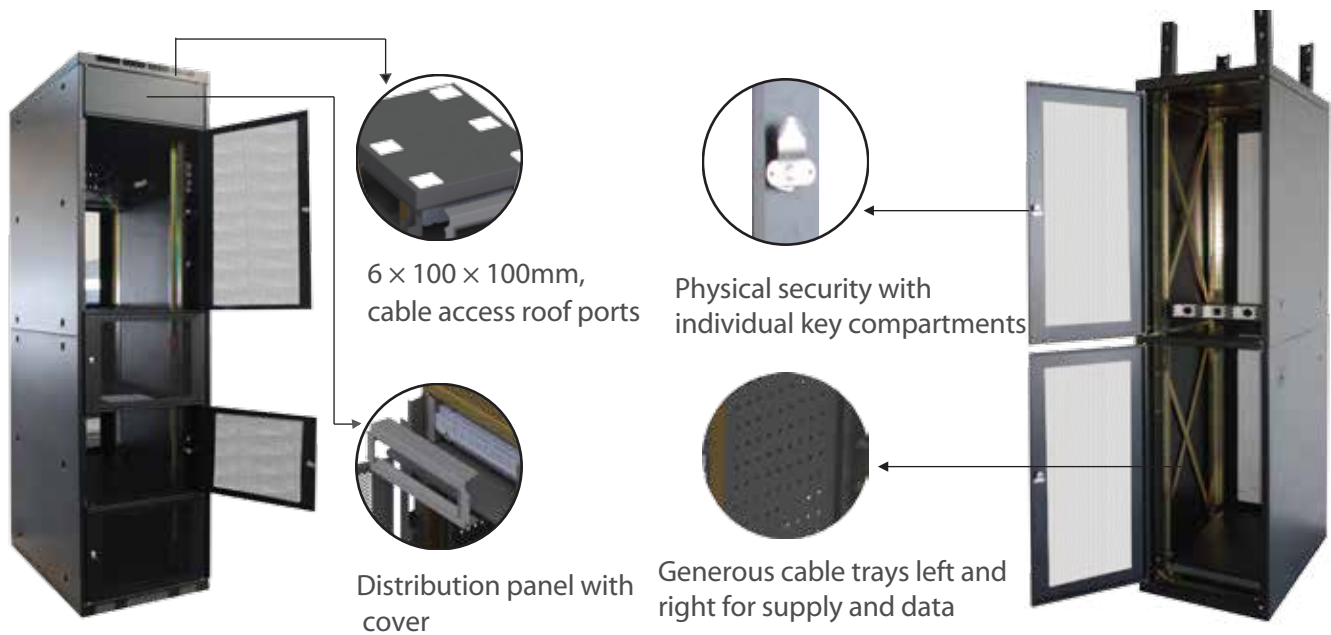

Product code	Description
CLCMB2B60270N	Co-location cabinet, 2 compartments @ 20RU , with mesh front and rear doors, black sand coating, 600W×1000D×2700H

CLC M B 2 B 60 100 270 N

Rear Door Options
 P - Plain steel locking
 T - Transparent
 M - Mesh vented door
 N - No door supplied

Colour Options
 B - Black sand
 W - Penrose white
 X - Customer special

Number of Compartment
 2 , 3 , 4 , 5

Seismic Options
 S - Seismic compliance
 N - Not seismic cabinet

Overall sizes (cm)
 height 2700H
 depth 1000D
 width 600W

Height Options
 A - 10RU
 B - 20RU
 X - Customer special

